

INSTALLATION GUIDELINE



Take out the tail sleeve and put it into the optical cable




Use Fiber Optic Stripper Strip the fiber coating





Fiber Optic Stripper+Fixed length



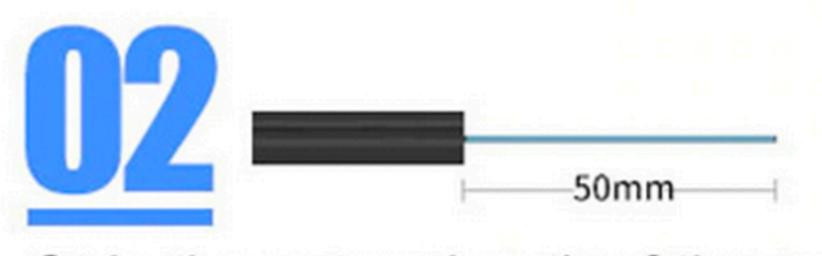

Strip the outer sheath of the optical cable and keep the covering layer. The length is 50mm.



FTTH drop cable stripper






Remove impurities with alcohol





Alcohol bottle + paper towel




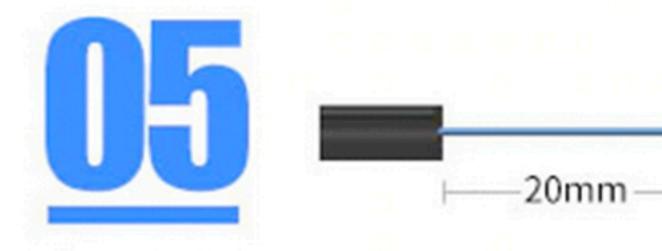

Cut fiber optical



Optical Fiber cleaver

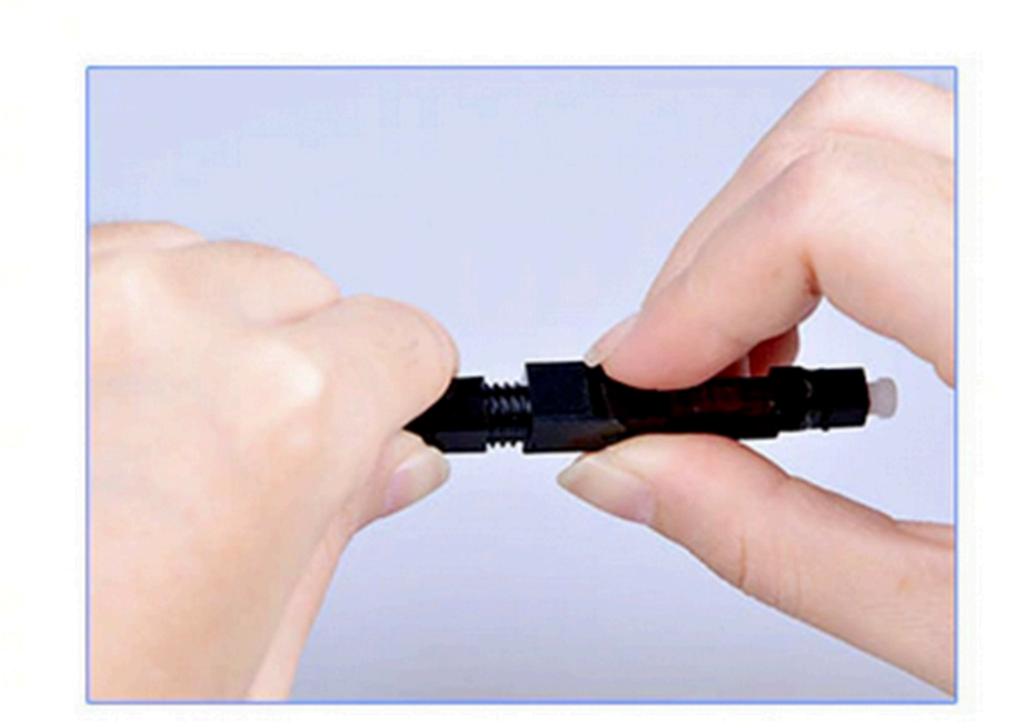




Using an optical fiber end cap clamping



The optical fiber penetrates from the tail of the connector, causing the optical fiber to bend

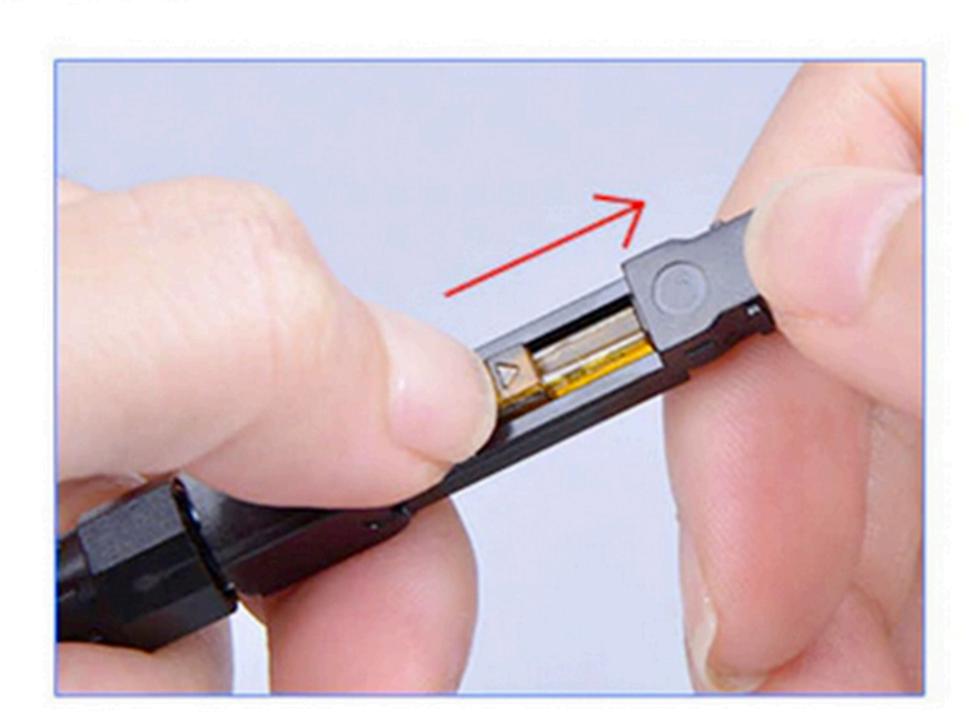

Move the switch up to the top



Put on the blue protective sleeve the assembly is complete